


HANTS® FIRE PROTECTION

UL OS&Y GATE VALVE

HGO-200GG

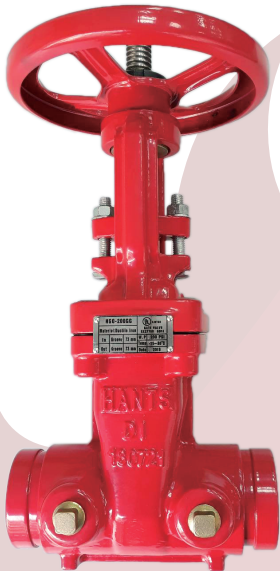

HGO-200GG

Valve Standard:

Conforms to AWWA C515

Working pressure:

200PSI


Flanged Ends:

ANSI B16.1 Class125

ANSI B16.42 Class150

EN1092-2 PN16

Size: 2 1/2"(DN65) to 12"(DN300)

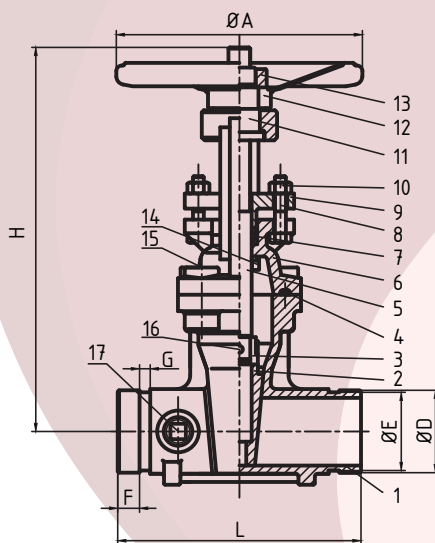

No.	Parts Name	Material
1	Body	Ductile Iron
2	Disc	Ductile Iron+EPDM
3	Connecting Part	ASTM A148
4	Sealing Pad	EPDM
5	Stem	SS304
6	Cap	Ductile Iron
7	Sealing Kits	PTFE
8	Bolt	Steel
9	Platen	Ductile Iron
10	Nut	SS304
11	Rotating Nut	ASTM B148
12	Handwheel	ASTM A1045
13	Lock Net	ASTM A1045
14	Flat Key	Steel
15	Countersunk Head Bolt	Steel
16	Cylinder Pin	Steel
17	Plug	Cast Bronze

Size(mm)	2"	2.5"	3"	4"	5"	6"	8"	10"	12"
DN	50	65	80	100	125	150	200	250	300
L	178	190	203	229	254	267	292	330	356
H	280	310	370	428	532	590	735	908	1150
øA	180	220	250	280	300	350	380	450	450
øD	60.3	76.1	88.9	114.3	141.3	168.3	219.1	273	323.9
øE	57.2	72.3	84.9	110.1	137	163.9	214.4	268.3	318.3
F	15.9	15.9	15.9	15.9	15.9	15.9	19	19	19
G	7.9	7.9	7.9	9.5	9.5	9.5	11.1	12.7	12.7

Web-site: www.z-tide.com / www.hants.com.tw